
**This Page Is Inserted by IFW Operations
and is not a part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- **BLACK BORDERS**
- **TEXT CUT OFF AT TOP, BOTTOM OR SIDES**
- **FADED TEXT**
- **ILLEGIBLE TEXT**
- **SKEWED/SLANTED IMAGES**
- **COLORS PHOTOS**
- **BLACK OR VERY BLACK AND WHITE DARK PHOTOS**
- **GRAY SCALE DOCUMENTS**

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 908 162 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

14.04.1999 Bulletin 1999/15

(51) Int Cl.⁶: A61F 13/15

(21) Application number: 98308151.4

(22) Date of filing: 07.10.1998

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(72) Inventor: Sayama, Yasushi,

c/o Research & Development Div.

Mitoyo-gun, Kagawa-ken, 769-1602 (JP)

(74) Representative: Parry, Christopher Stephen

Saunders & Dolleymore,

9 Rickmansworth Road

Watford, Herts. WD1 7HE (GB)

(30) Priority: 08.10.1997 JP 276187/97

(71) Applicant: UNI-CHARM CORPORATION


Kawanoe-shi Ehime-ken (JP)

(54) Disposable diaper

(57) A disposable diaper includes a main body 1 and a supplemental member 2, the main body 1 being formed on its inner surface in its transversely middle zone with a cavity 5 adapted to receive excretion, for example, feces. The cavity 5 is defined by a pair of side walls 41 spaced apart from each other by a predetermined distance in the transversely middle zone of the main body 1 and extending longitudinally of the main

body 1, and a top wall 30 extending between distal edges 41A of the respective side walls 41. The top wall 30 is formed with openings 31, 32 adapted to guide feces and urine, respectively, and elastic members 43 are secured to the supplemental member 2 in the proximity of upper edges of the respective side walls 41 so as to be operatively associated with a crotch region 18 of the diaper.

FIG. 1

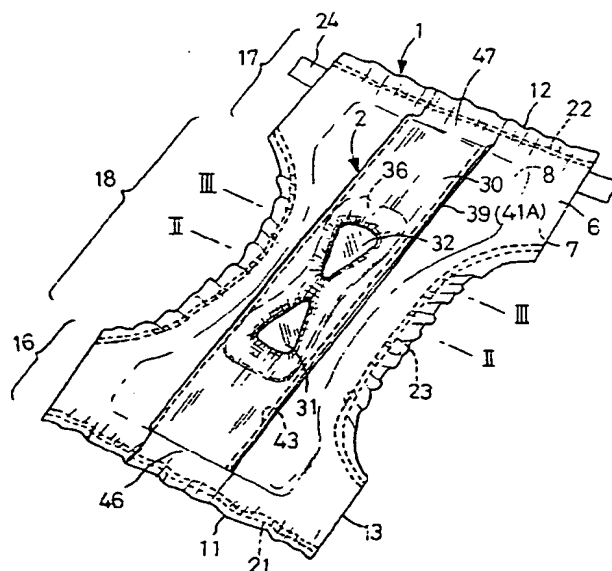

Description

[0001] This invention relates to disposable diapers and more particularly to disposable diapers having a cavity adapted to receive excretion.

[0002] Japanese Patent Application Disclosure Gazette (Kokai) No. Hei5-285174 discloses a disposable diaper comprising an opening formed in a topsheet lying inside the diaper in its transversely middle zone, a pair of flaps extend laterally from transversely opposite side edges of the opening and elastic members provided along respective outer edges of the flaps. With this arrangement, the pair of flaps slope downward under the effect of the elastic members and facilitate excretion to flow into the opening.

[0003] With the above-mentioned diaper of prior art, the outer edges of the respective flaps are tightly placed against a wearer's body, for example, inguinal region and thereby a faces receiving pocket which is effective also to prevent excretion from leaking sideways. Even if the wearer's movement such as walking causes the diaper to shift in the wearer's crotch region, such movement will be absorbed by deformation of the flaps. Consequently, the flaps will have their outer side edges continuing to be tightly placed against the wearer's body substantially without formation of an undesirable gap which might cause body fluids to leak sideways. However, such effect can be obtained only when a movement of the diaper is as small as negligible since a sufficient contacting area is unavailable between the outer side edges and the wearer's skin. To ensure that the outer side edges of the flaps can be maintained in tight contact even when a movement of the diaper is relatively large, a stretching stress of the elastic members may be correspondingly increased. Such countermeasure, however, is inevitably limited because it may cause the elastic members to be uncomfortably pressed against the wearer's skin and create a feeling of discomfort against a wearer or even may adversely affect the normal blood circulation.

[0004] In view of the above problems, it is an object of the invention to provide an improvement such that, even when a movement of a diaper relative to the wearer's crotch region is relatively large, an opening of a pocket or a cavity adapted to receive and hold excretion such as feces can be reliably maintained in close contact with the wearer's skin without unacceptably shifting.

[0005] According to the invention, there is provided a disposable diaper having a longitudinal direction, a transverse direction, a front waist region, a rear waist region and a crotch region therebetween, the diaper comprising an main body and a supplemental member; the main body including a liquid-permeable topsheet, a liquid-impermeable backsheet and a liquid-absorbent core disposed therebetween; the supplemental member including a pair of side walls having proximal edges and distal edges and extending in the longitudinal direction and spaced apart from each other by a predetermined

distance in the transverse direction, a top wall extending between the distal edges of the side walls, and a cavity defined by the side walls and the top wall; each of the side walls being bonded at the proximal edge onto the topsheet; the top wall being formed with an opening adapted to guide excretion into the cavity; and elastic members being secured to the supplemental member in the proximity of the distal edges of the side walls under appropriate tension so that the elastic members normally bias the side walls to rise up on the topsheet and simultaneously bias the top wall to be spaced apart from the topsheet.

[0006] According to a preferred embodiment of this invention, the top wall is formed with a pair of openings adapted to guide feces and urine of excretion separately.

[0007] According to another preferred embodiment of this invention, the leakage-proof walls as well as the top wall are made of hydrophobic sheets. Embodiments of the invention are described below with reference to the accompanying drawings in which:

Fig. 1 is a perspective view illustrating an embodiment of a disposable diaper according to the invention;

Fig. 2 is a sectional view taken along a line II - II in Fig. 1;

Fig. 3 is a sectional view taken along a line III - III in Fig. 1;

Fig. 4 is a view similar to Fig. 2 but illustrating the diaper as in its curved state; and

Fig. 5 is a view similar to Fig. 2 but illustrating an alternative embodiment of the invention.

[0008] Details of a disposable diaper provided according to the invention will be more fully understood from the following description made with reference to the accompanying drawings.

[0009] Figs. 1 and 2 illustrate an embodiment of a disposable diaper according to the invention respectively in a perspective view and in a sectional view taken along a line II - II in Fig. 1. The diaper comprises a main body 1 serving to absorb and to contain body fluids and a supplemental member 2 lying on a top surface of the main body 1 so as to form together with the main body 1 a cavity 5 adapted to trap excrement.

[0010] The main body 1 includes a liquid-permeable topsheet 6, a liquid-impermeable backsheet 7 and a liquid-absorbent core 8 disposed between these two sheets 6, 7. These sheets 6, 7 are placed one upon another and bonded together by means of hot melt adhesive (not shown) along their portions extending outward beyond peripheral edges of the core 8. As a whole, the main body 1 presents a shape of hour-glass. Such hour-glass-shaped main body 1 is defined by longitudinally opposite ends 11, 12 and transversely opposite side edges 13, 13. As viewed longitudinally, the main body 1 has a front waist region 16, a rear waist region 17 and

a crotch region 18 extending between these front and rear waist regions 16, 17. In the crotch region 18, the side edges 13, 13 are inwardly curved so as to extend around the wearer's legs when the diaper is actually put on the wearer's body.

[0011] Adjacent the longitudinally opposite ends 11, 12, elastic members 21, 22 are bonded under appropriate tension to an inner surface of at least one of the topsheet 6 and the backsheet 7 so as to extend circumferentially of the diaper. Also adjacent the side edges 13 in the crotch region 18, elastic members 23 are bonded under appropriate tension to the inner surface of at least one of the topsheet 6 and the backsheet 7 so as to extend around the wearer's legs when the diaper is actually put on the wearer's body. In the rear waist region 17, a pair of tape fasteners 24 extend laterally from the respective side edges 13.

[0012] The supplemental member 2 lies on the top surface of the main body 1 and longitudinally extends along a transversely middle zone of the main body 1. The supplemental member 2 includes a top wall 30 which is formed with a first opening 31 and a second opening 32. Locations of these first and second openings 31, 32 are selected so that the first and second openings 31, 32 are substantially centered with the wearer's urinary organs and anus, respectively. As will be apparent from Fig. 2, the supplemental member 2 includes inner and outer sheets 33, 34 placed one upon another and integrated by means of hot melt adhesive (not shown) as well as a absorbent pad member 36 disposed between these inner and outer sheets 33, 34 along peripheral edges of the first and second openings 31, 32. Transversely opposite side portions of the inner and outer sheets 33, 34 are folded in Z- and inverted Z-shapes. With the supplemental member 2, any one of the first and second openings 31, 32 may be eliminated or these two openings 31, 32 may be combined into a single larger opening, if desired.

[0013] With the inner and outer sheets 33, 34 having been folded in the manner as described above, the supplemental member 2 is defined by the top wall 30 and transversely opposite side walls 41, 41 consisting of lower portions 37 and upper portions 38 extending outward from the lower portions 37 to side edges 39 of the top wall 30. The side edges 39 correspond to distal edges 41A of the respective side walls 41. According to this embodiment, the respective lower portions 37 are bonded at least over their partial widths along their proximal edges 37A to the topsheet 6 by means of hot melt adhesive 42. Obviously, it is also possible to bond the lower portions 37 to the topsheet 6 over their full widths. The respective side walls 37 are spaced apart from each other by a predetermined distance. Adjacent the respective distal edges 41A of the side walls 41, i.e., adjacent the respective side edges 39 of the top wall 30, there are provided elastic members 43 associated with the crotch region 18. These elastic members 43 extend longitudinally of the diaper and are secured under appropriate

tension to an inner surface of at least one of the inner and outer sheets 33, 34. At longitudinally opposite ends 46, 47 (See Fig. 1) of the supplemental member 2, the top wall 30, the lower portions 37 and the upper portion 38 are placed one upon another and bonded together, on one hand, and bonded to the main body 1 in the proximity of the longitudinally opposite ends 11, 12 of the main body 1, on the other hand, by means of adhesive (not shown). While the top wall 30 is shown as spaced apart upward from the topsheet 6 of the main body 1 in order to facilitate a sectional construction of the diaper to be understood, the top wall 30 actually lies closely adjacent to or even in contact with the main body 1.

[0014] Fig. 3 is a sectional view taken along a line III-III in Fig. 1. The second opening 32 is formed in a transversely middle zone of the top wall 30 and, along an peripheral edge of the second opening 32, the inner and outer sheets 33, 34 are bonded together using adhesive or heat-sealing technique. The absorbent pad 36 extends around the second opening 32. The first opening 31 presents its sectional configuration similar to that of the second opening 32.

[0015] Fig. 4 is a view similar to Fig. 2 but illustrating the diaper put on the wearer's body (not illustrated). As the diaper is put on the wearer's body, the diaper is curved with the topsheet 6 lying inside, not only as viewed longitudinally but also as viewed transversely of the diaper. With the diaper curved in this manner, the elastic members 43 associated with the crotch region 18 contract and cause the free remainders, if any, of the respective lower portions 37 as well as the respective upper portions 38 to rise up on the inner surface, i.e., the topsheet 6 of the main body 1. Consequently, the top wall 30 is spaced apart upward from the inner surface of the main body 1. In this way, the cavity 5 defined by the main body 1 and the supplemental member 2 so as to receive both feces and urine has its inner volume enlarged to the maximum. Thereupon, the top wall 30 including the portions of the side walls 41 extending in the proximity of their distal edges 41A are tightly placed against the wearer's crotch region.

[0016] Imaginary lines in Fig. 4 exemplarily indicate respective positions occupied by the main body 1 and the supplemental member 2 when the diaper has laterally shifted relatively to the wearer's crotch region. With the diaper of well known art, substantially no change occurs in the relative position of the main body 1 and the supplemental member 2 so far as the diaper shifts together with the wearer's crotch region. However, when the diaper shifts independently of the wearer's crotch region, an undesirable change may occur in the foresaid relative position so that, for example, the diaper may get out of the wearer's urinary organs and anus. In this regard, the invention provides a unique arrangement such that the part of the diaper intended to come in contact with the wearer's crotch region particularly around urinary organs and anus is limited to the top wall 30 including the portions of the upper portions 38 extending in

the proximity of their distal edges 41A. Such part of the supplemental member 2 is connected by the relatively deformable upper portions 38 to the main body 1. With such an arrangement, shift or movement of the main body 1 is absorbed in the form of corresponding shift or movement of the side walls 41 and substantially not transmitted to the top wall 30. Even when a movement of the main body 1 pulls one of the side walls 41, for example, the side wall 41X leftward as viewed in Fig. 4, the top wall 30 is maintained in tight contact with the wearer's body under the effect of the elastic members 43 extending along the distal edges 39 of the side walls 41 so as to operate in association with the crotch region 18. In addition, a frictional force generated between the top wall 30 itself and the wearer's body against which the top wall 30 is tightly placed is effective to reduce a tensile strength transmitted from the side wall 41X via the top wall 30 to one of the elastic members, for example, the elastic member 43Y. This makes a movement of the top wall 30 further difficult.

[0017] Fig. 5 is a view similar to Fig. 2 but illustrating an alternative embodiment of the invention. According to this alternative embodiment, the main body 1 comprises a liquid-absorbent core 8, a liquid-permeable topsheet 6 extending between longitudinally opposite ends of the core 8 and a liquid-impermeable backsheet 8 extending outward beyond peripheral edges of the core 8. The inner sheet 33 of the supplemental member 2 has its outer side edges 33 substantially in coincidence with outer side edges of the topsheet 6. The outer sheet 34 extends outward beyond the peripheral edges of the core 8 so as to be placed upon and bonded to the backsheet 7. The topsheet 6 and the backsheet 7 may be selectively bonded or not bonded to the core 8 by means of adhesive. The elastic members 23 intended to surround the wearer's legs are secured to the inner surface of at least one of said backsheet 7 and the outer sheet 34.

[0018] According to the invention, a nonwoven fabric or porous plastic sheet may be used as material for the topsheet 6 and such material may be suitably treated to make it hydrophilic prior to its use. A plastic sheet or such plastic sheet laminated with nonwoven fabric may be used as material for the backsheet 7. Fluffy pulp or a mixture of such fluffy pulp and polymer powder of high absorptivity may be used as material for the core 8. Of the inner and outer sheets 33, 34, at least the outer sheet 34 is preferably made of a hydrophobic sheet, more preferably, of hydrophobic and liquid-impermeable sheet. The inner sheet 33 may be made of a hydrophilic sheet, if necessary. The absorbent pad 36 may be made of natural fibers such as fluffy pulp or cotton, synthetic fibers, preferably crimped synthetic fibers, or a soft foam plastic sheet such as urethane foam sheet.

[0019] The cavity to receive excretion, the most important feature of the diaper according to the invention, is normally biased by the elastic members associated with the crotch region to rise up on the inner surface of

the main body. The cavity includes transversely opposite side walls having a relatively high freedom of movement and the top wall extending the distal edges of the respective side walls so as to be tightly placed against the wearer's crotch region particularly around the wearer's urinary organs and anus. Such feature ensures that the top wall does not readily get out of its normal position properly covering the urinary organs and anus and therefore the cavity can reliably catch excretion even if the diaper shifts independently of the wearer's body.

Claims

1. A disposable diaper having a longitudinal direction, a transverse direction, a front waist region, a rear waist region and a crotch region therebetween, the diaper comprising an main body and a supplemental member;

the main body including a liquid-permeable topsheet, a liquid-impermeable backsheet and a liquid-absorbent core disposed therebetween; the supplemental member including a pair of side walls having proximal edges and distal edges and extending in the longitudinal direction and spaced apart from each other by a predetermined distance in the transverse direction, a top wall extending between the distal edges of the side walls, and a cavity defined by the side walls and the top wall; each of the side walls being bonded at the proximal edge onto the topsheet; the top wall being formed with an opening adapted to guide excretion into the cavity; and elastic members being secured to the supplemental member in the proximity of the distal edges of the side walls under appropriate tension so that the elastic members normally bias the side walls to rise up on the topsheet and simultaneously bias the top wall to be spaced apart from the topsheet.

2. The diaper according to Claim 1, wherein the top wall is formed with a pair of openings adapted to guide feces and urine of excretion separately.
3. The diaper according to Claim 1, wherein the leakage-proof walls and the top wall are made of a hydrophobic sheet.
4. The diaper according to Claim 2, wherein an absorbent pad extends around the openings.
5. The diaper according to Claim 1, wherein the supplemental member includes an inner sheet and an outer sheet bonded to the inner sheet.

6. A disposable diaper having a longitudinal direction, a transverse direction, a front waist region, a rear waist region and a crotch region therebetween, the diaper comprising a main body and a supplemental member;

5

the main body including a liquid-permeable top-sheet, a liquid-impermeable backsheet and a liquid-absorbent core disposed therebetween, the crotch region being inwardly curved at transverse side edges thereof, elastic members being secured to the main body along longitudinally opposite ends thereof and along curved edges of the crotch region; 10

the supplemental member including a pair of side walls having proximal edges and distal edges and extending in the longitudinal direction and spaced apart from each other by a predetermined distance in the transverse direction, a top wall extending between the distal edges of the side walls, and a cavity defined by the side walls and the top wall; 20

each of the side walls being bonded at the proximal edge onto the topsheet;

the top wall being formed with an opening adapted to guide excretion into the cavity; and elastic member being secured to the supplemental member in the proximity of the distal edges of the side walls under appropriate tension so that the elastic members normally bias the side walls to rise up on the topsheet and simultaneously bias the top wall to be spaced apart from the topsheet. 30

35

40

45

50

55

FIG. 1

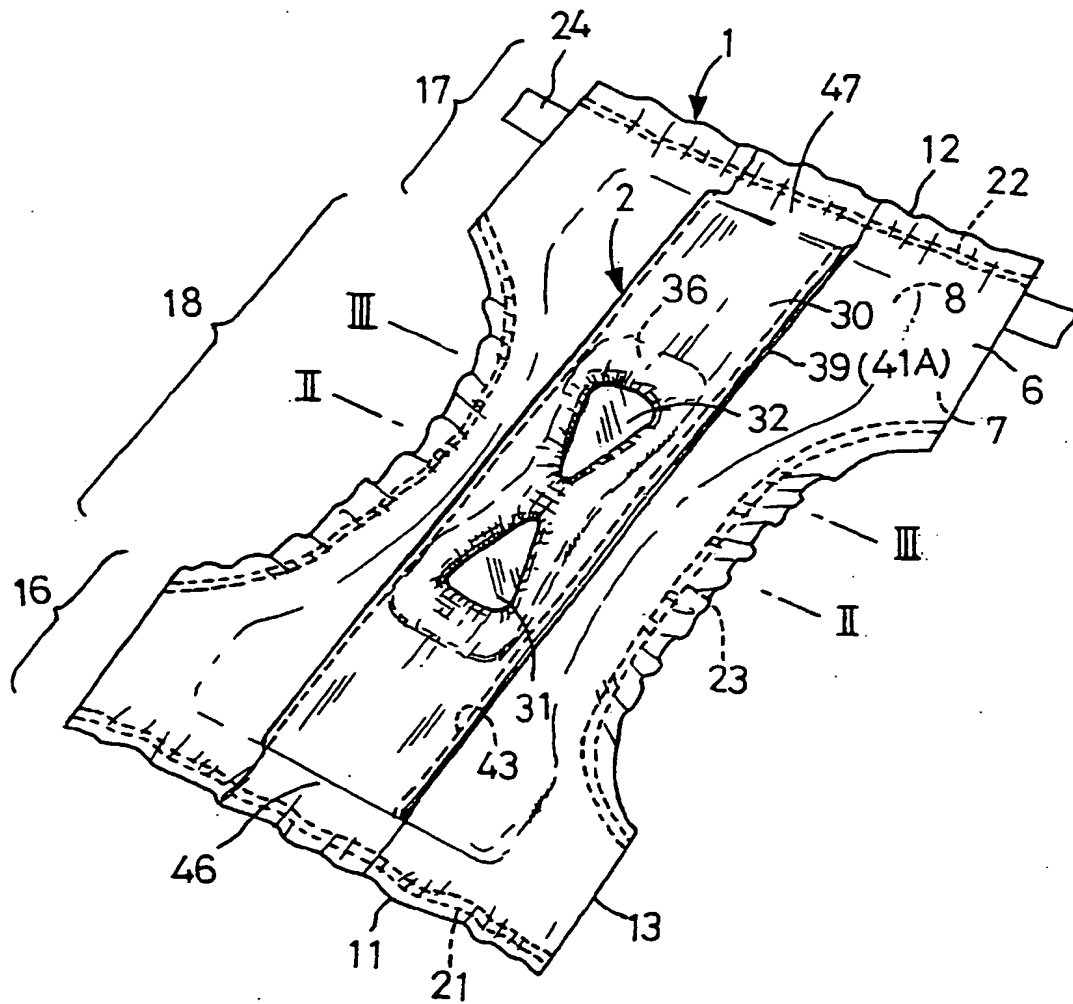


FIG.2

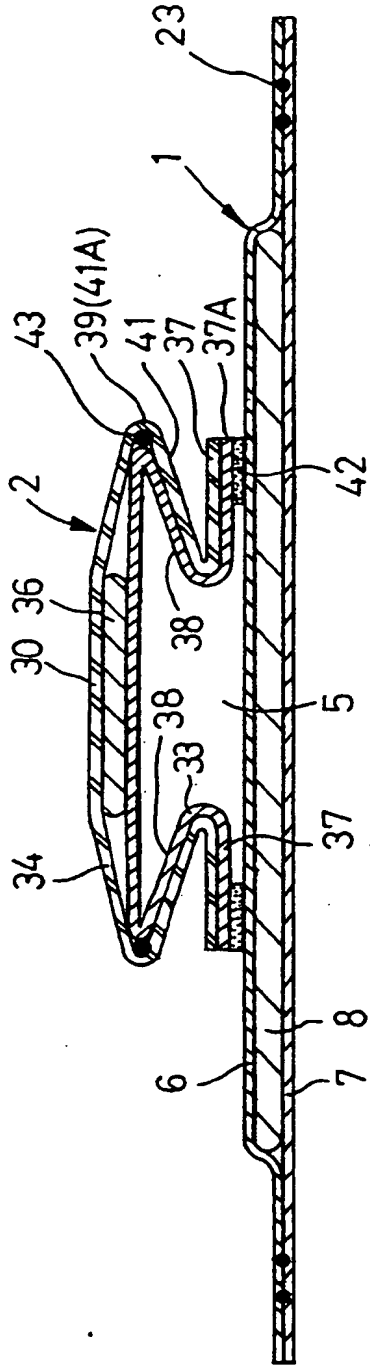


FIG.3

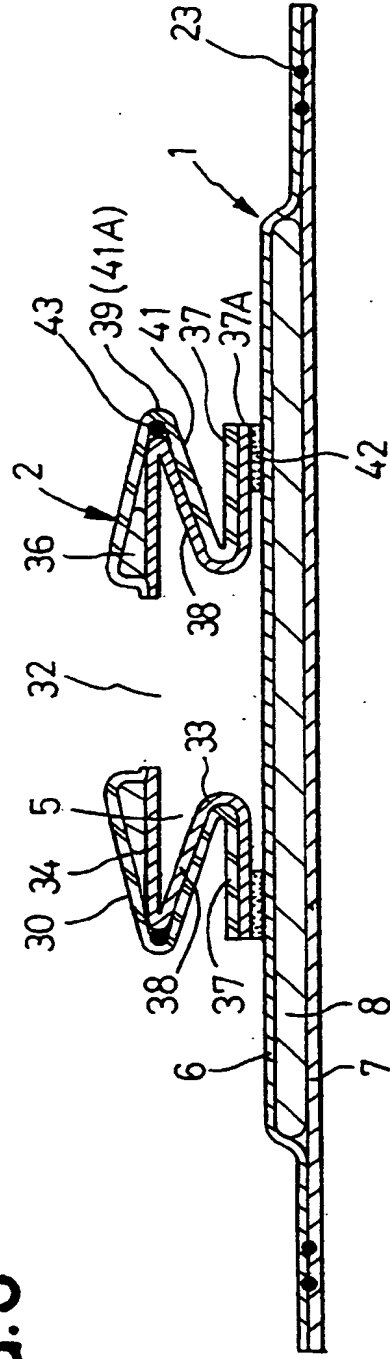


FIG.4


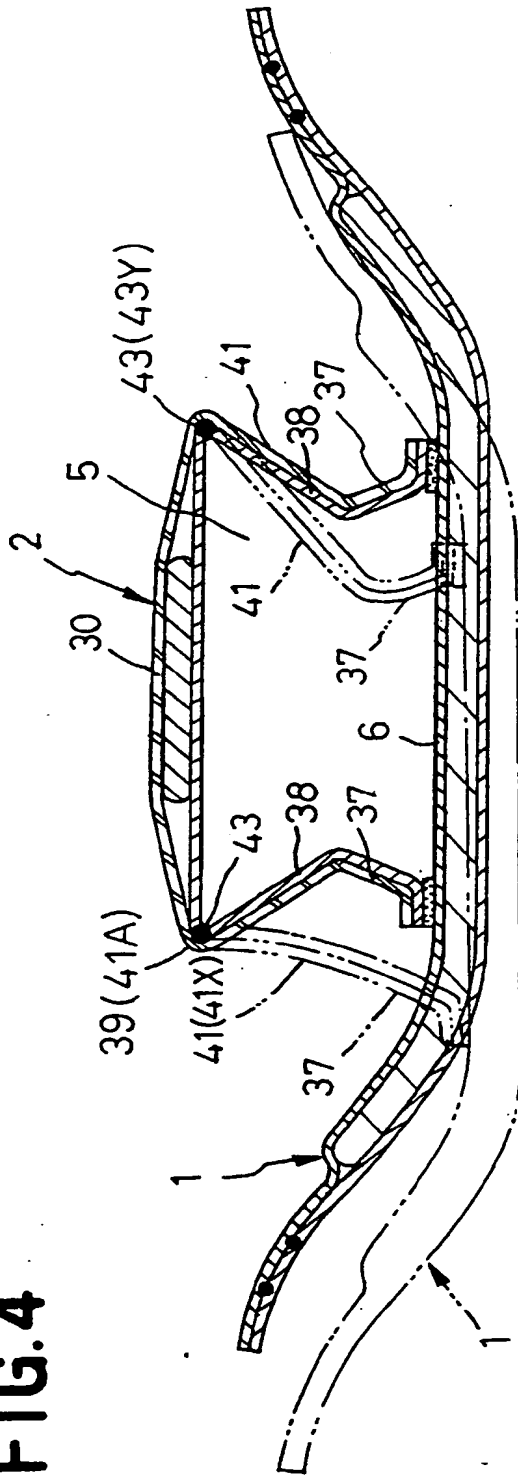


FIG.5



(19)

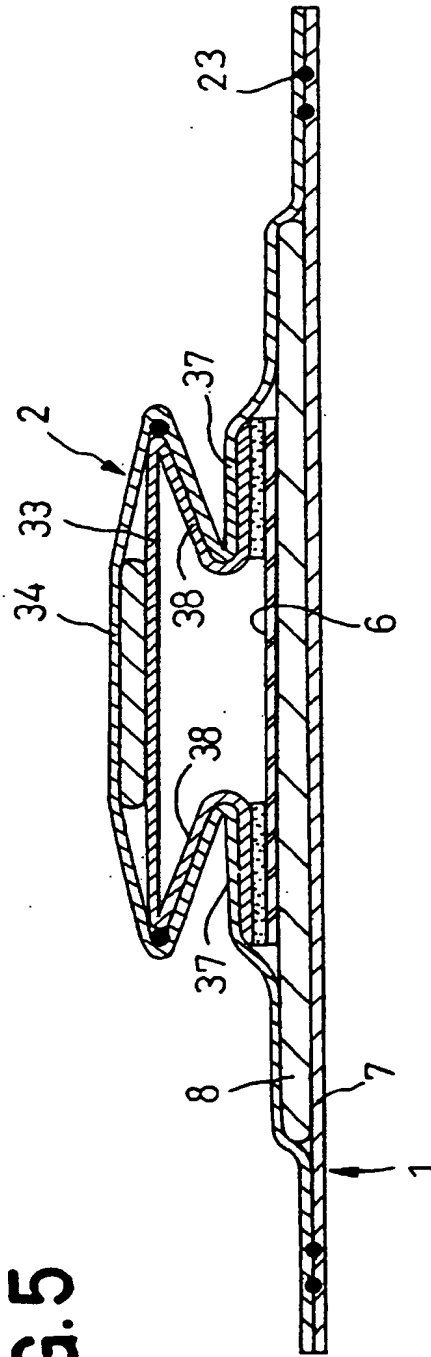

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 908 162 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
22.12.1999 Bulletin 1999/51

(51) Int Cl.⁶: **A61F 13/15**

(43) Date of publication A2:
14.04.1999 Bulletin 1999/15

(21) Application number: **98308151.4**

(22) Date of filing: **07.10.1998**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Sayama, Yasushi,**
c/o Research & Development Div.
Mitoyo-gun, Kagawa-ken, 769-1602 (JP)

(30) Priority: **08.10.1997 JP 27618797**


(74) Representative: **Parry, Christopher Stephen**
Saunders & Dolleymore,
9 Rickmansworth Road
Watford, Herts. WD1 7HE (GB)

(71) Applicant: **UNI-CHARM CORPORATION**
Kawanoe-shi Ehime-ken (JP)

(54) **Disposable diaper**

(57) A disposable diaper includes a main body 1 and a supplemental member 2, the main body 1 being formed on its inner surface in its transversely middle zone with a cavity 5 adapted to receive excretion, for example, feces. The cavity 5 is defined by a pair of side walls 41 spaced apart from each other by a predetermined distance in the transversely middle zone of the main body 1 and extending longitudinally of the main body 1, and a top wall 30 extending between distal edges 41A of the respective side walls 41. The top wall 30 is formed with openings 31, 32 adapted to guide feces and urine, respectively, and elastic members 43 are secured to the supplemental member 2 in the proximity of upper edges of the respective side walls 41 so as to be operatively associated with a crotch region 18 of the diaper.

FIG. 1

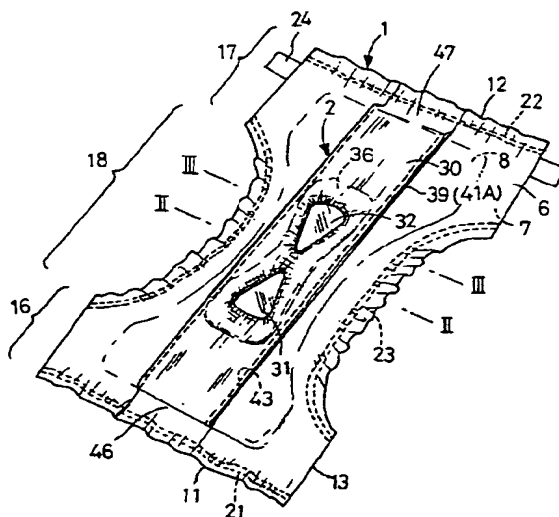

EP 0 908 162 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 30 8151

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
P,X	WO 97 39710 A (KIMBERLY CLARK CO) 30 October 1997 (1997-10-30) * page 23, line 17 - line 35: figures 7,12,13 * * page 24, line 10 - line 34 *	1,4-6	A61F13/15
X	GB 2 294 398 A (KIMBERLY CLARK CO) 1 May 1996 (1996-05-01) * page 24, line 4 - line 24: claims 10,17,18,25; figures 7,8 * * page 18, line 30 - line 34 * * page 9, line 32 - page 10, line 10: figure 5 *	1,2,4,6	
X	US 5 304 159 A (SOGA HIROYUKI ET AL) 19 April 1994 (1994-04-19) * column 3, line 8 - line 49: claim 1; figures 1,2 * * column 3, line 61 - column 4, line 17 * * column 5, line 26 - line 39 *	1,3,5,6	
X	EP 0 631 767 A (BREGER GIBSON LTD) 4 January 1995 (1995-01-04) * column 19, line 13 - line 52: claims 1-3,6,10,11; figures 3,4 * * column 18, line 51 - column 19, line 3; figure 1 *	1,6	TECHNICAL FIELDS SEARCHED (Int.Cl.6) A61F
X	GB 2 287 888 A (MOELNLYCKE AB) 4 October 1995 (1995-10-04) * page 10, line 6 - line 20: claims 1,2,4,5; figures 1,2,5 *	1,2	
X	GB 2 296 441 A (MOELNLYCKE AB) 3 July 1996 (1996-07-03) * page 4, line 31 - page 5, line 16: figures 2,3 * * page 6, line 10 - line 20 *	1-3	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 29 October 1999	Examiner July, F
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document</p> <p>T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date C: document cited in the application L: document cited for other reasons S: member of the same patent family, corresponding document</p>			

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 30 8151

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

29-10-1999

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9739710 A		30-10-1997	US 5853403 A	29-12-1998
			AU 704958 B	13-05-1999
			AU 2446697 A	12-11-1997
			BR 9708852 A	13-04-1999
			CA 2250147 A	30-10-1997
			EP 0901358 A	17-03-1999
			US 5947947 A	07-09-1999
GB 2294398 A		01-05-1996	AU 696498 B	10-09-1998
			AU 3463995 A	15-05-1996
			CA 2202400 A	02-05-1996
			EP 0790814 A	27-08-1997
			FR 2725893 A	26-04-1996
			JP 10511863 T	17-11-1998
			WO 9612458 A	02-05-1996
			US 5853403 A	29-12-1998
			ZA 9508274 A	08-05-1996
US 5304159 A		19-04-1994	JP 5293134 A	09-11-1993
			AU 3674093 A	28-10-1993
			CA 2093700 A,C	22-10-1993
			CN 2162945 U	27-04-1994
			DE 59305019 D	20-02-1997
			EP 0567105 A	27-10-1993
			ES 2098580 T	01-05-1997
			GB 2266225 A,B	27-10-1993
EP 0631767 A		04-01-1995	GB 2280374 A	01-02-1995
GB 2287888 A		04-10-1995	SE 502549 C	13-11-1995
			AT 162391 T	15-02-1998
			AU 686357 B	05-02-1998
			AU 2114495 A	09-10-1995
			CA 2185149 A	28-09-1995
			CN 1143904 A	26-02-1997
			CZ 9602712 A	12-02-1997
			DE 69501500 D	26-02-1998
			DE 69501500 T	20-05-1998
			DK 748199 T	06-04-1998
			EP 0748199 A	18-12-1996
			ES 2114315 T	16-05-1998
			FI 963665 A	17-09-1996
			GR 3026034 T	30-04-1998
			HU 77217 A	02-03-1998
			IL 112671 A	04-01-1998
			JP 9510384 T	21-10-1997

EPO FORM P0453

For more details about this annex : see Official Journal of the European Patent Office. No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 30 8151

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

29-10-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 2287888 A		NO 963807 A	30-10-1996
		NZ 283173 A	28-07-1998
		PL 316173 A	23-12-1996
		SE 9400916 A	19-09-1995
		WO 9525493 A	28-09-1995
		SK 117796 A	06-08-1997
		ZA 9501586 A	08-12-1995
GB 2296441 A	03-07-1996	SE 503781 C	02-09-1996
		AU 4403496 A	24-07-1996
		CZ 9702015 A	15-10-1997
		EP 0800366 A	15-10-1997
		JP 10511580 T	10-11-1998
		PL 320666 A	13-10-1997
		SE 9404567 A	01-07-1996
		WO 9620666 A	11-07-1996
		SK 72597 A	14-01-1998
		TR 960818 A	21-10-1996
		ZA 9511041 A	11-07-1996

EPO FORM 104/99

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82